NT2000C-S/SP2 电流传感器 Current Transducer

版本：A

产 品 说 明 Applications

该磁平衡式霍尔电流传感器适用于对交流、直流和脉动电流的隔离精确测量，测量时一次侧与二次侧之间完全绝缘。

For the electronic measurement of currents: AC, DC IMPL.,etc.,with galvanic isolation between the primary (high power) and the secondary (electronic) circuits.



产品优点 Advantages	产品应用 Applications	参照标准 Standards
高精度 Excellent accuracy	交流变频器 AC variable speed drives	EN50178
线性度好 Very good linearity	变流器/逆变器 converter /inverter	EN50155
低温漂 Low temperature drift	UPS/SVG	
宽频带 Wide frequency bandwidth		
快速响应 Optimized response time		

主要电气参数 Main electrical data		
额定测量电流 I_{PN}（A）	Primary nominal current rms	2000
测量范围 I_P（A）	Primary current measuring range	0～±3500
匝比	Conversion ratio	1:5000
电源电压 V_C（V）	Supply voltage	DC±(15~24)×(1±10%)V
额定测量输出 I_{SN}(mA)	Secondary nominal current rms	400mA
测量电阻 R_M（Ω）	Measuring resistance	

		$R_M$min	$R_M$max
with +/-15V	@ +/-2000A max:	0 ohm	5.5 ohm
	@ +/-2200A max:	0 ohm	2.5 ohm
with +/-24V	@ +/-2000A max:	5ohm	26.5ohm
	@ +/-3000A max:	5 ohm	8.5ohm
	@ +/-3500A max:		5ohm


二次侧电流消耗 I_C(@±24V)	Current consumption	≤37mA+ Secondary output current I_{SN}
隔离耐压	Isolation test: Between the primary circuit to the secondary circuit	12kVrms/50Hz/1min

精度 - 动态参数 Accuracy - Dynamic performance data

基本误差 δi (@I_{PN}，T_A=25℃)	Overall Accuracy	≤±0.5%
线性度误差 δL (@I_{PN}，T_A=25℃)	Linearity error	＜0.1%
零点输出电流 I_O (@I_P=0，T_A=25℃)	Offset current	≤±0.4mA
零点温漂 I_{OT}	Thermal drift	≤±1mA（-40℃~+85℃）
响应时间 t_r	Response time to 90% of I_{PN} step	≤1us
di/dt 精确度	di/dt Accurately followed	＞50A/us
频率带宽 BW	Frequency bandwidth(-1dB)	DC..150kHz


一般数据 General data		
工作温度 Ta	Ambient operating temperature	-40℃~+85℃
储存温度 Ts	Ambient storage temperature	-45℃~+90℃
重量	Mass	≤1600g

外形图 Dimensions (in mm)

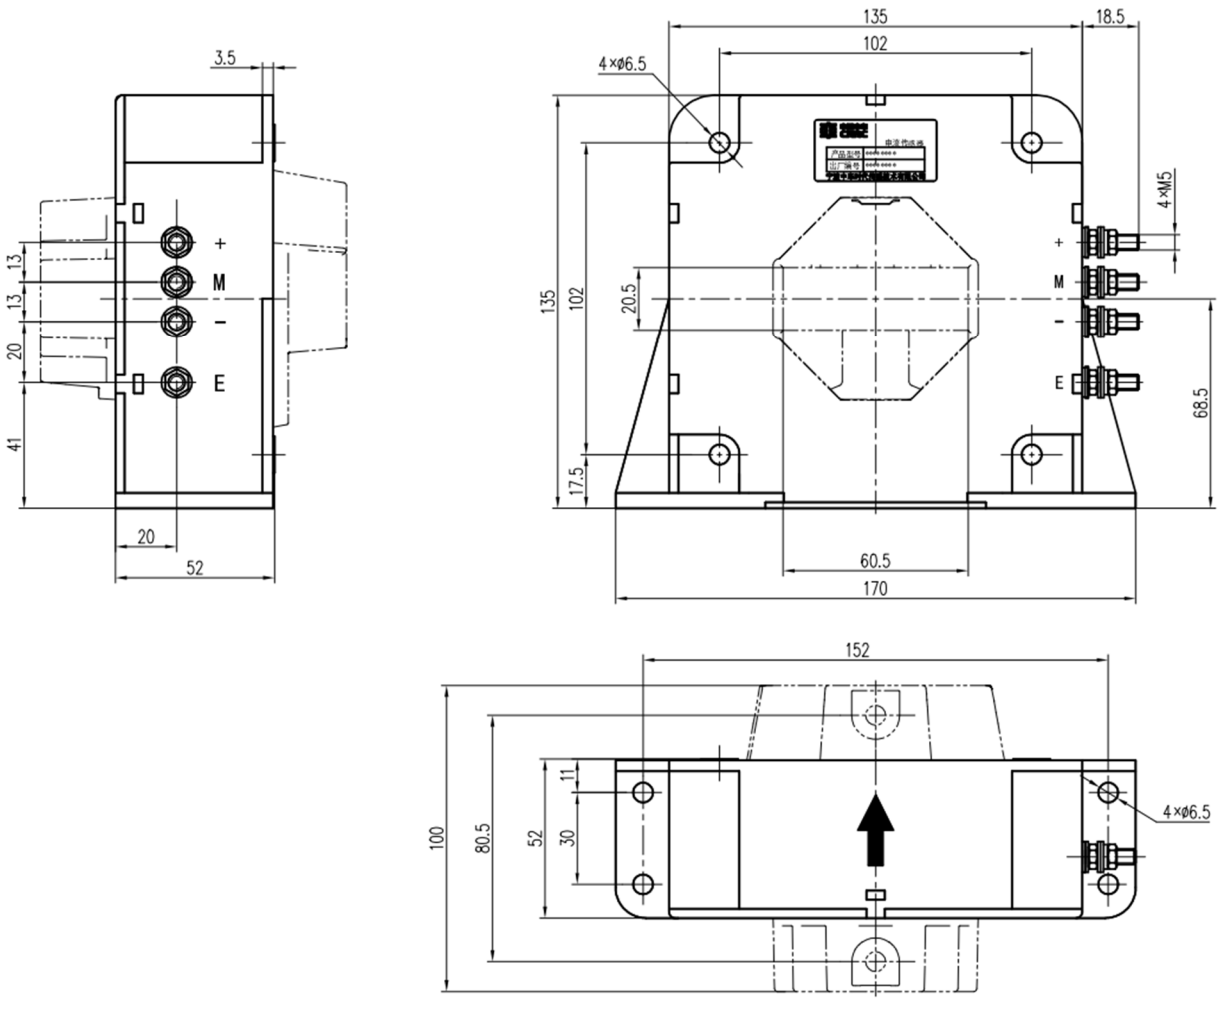

电气连接 Connection

Connection of secondary：4×M5 screw

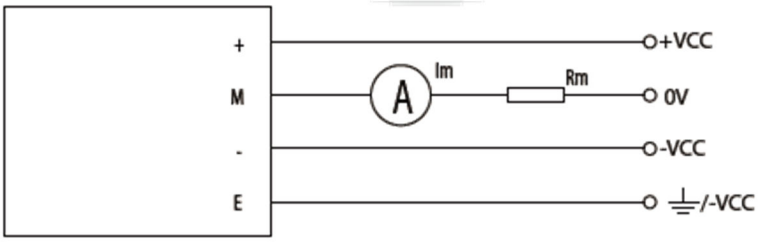

机械特征 Mechanical characteristics	
未注公差 General tolerance	±1 mm
传感器安装方式一(推荐) Transducer fastening （Recommended）	4 hole ø6.5mm 4 M6 steel screws
推荐力矩 Recommended fastening torque	4.5 N・m
母排尺寸(推荐) Bus bar（Recommended）	ø60.5mm
次边电气连接 Connection of secondary	4×M5 screw

备注 Remark

1. 当测量电流方向与传感器上标示的 ➡ 方向一致时，传感器输出 I_{SN} 为正。When measuring the current direction of arrow mark on direction and sensor, the sensor output ISN is positive.
2. 产品二次侧连接线优选屏蔽线，屏蔽层接近产品端连接线可接机壳，负电源或电源 0V。Product secondary side connecting line optimization shielding wire, cable shielding layer close to the product end can connect chassis, negative power or power 0 v.
3. 电量传感器安装螺钉孔的垂直度要求：要求在国家标准 8 级或以上（或 0.06 以下）。Power sensor mounting screw hole of the vertical degree requirements: requirements in the national standard grade 8 or above (or below 0.06).
4. 电量传感器安装面平面度要求：Sensor mounting surface flatness requirements:
   (a).大平面安装平面度国家标准 11 级或以上（或平面起伏小于 0.25mm）； Planeness national standard installation grade 11 or above (or surface fluctuation is less than 0.25 mm);
   (b).安装面加有小圆凸台设计时平面度要求达国家标准 12 级或以上（或平面起伏小于 0.5mm）；When mounting surface with a small round convex platform design flatness requirement of national standard grade 12 or more (or less than 0.5 mm) in plane ups and downs;